

# Specification Sheet



for the

# Solaro Day™

## Model #SD-40-CC-KIT



Solaro Day™ daylight system which uses one single source of solar power and multiple points of daylight simulators to light up your entire home, office, retail outlet, school, government building, or factory. Can be daisy chained with more than one Solaro Day™ fixture powered by solar panels from 30 watt minimum to 1000 watt maximum.

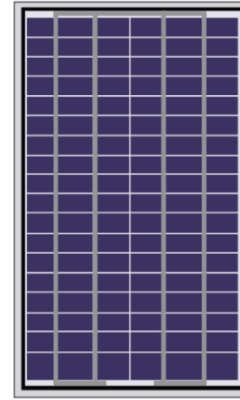


Please See Solar Panel Spec Sheet Model # E-SPL-50W for complete panel specs

Performance	
Lumens	4000 lm
Correlated Color Temperature	2800-3200K 4250-4750K 5500-6500K

Construction Materials	
Housing System:	Aluminum Extrusion
Diffuser:	Frosted Plastic Lens

Electrical	
Input Voltage:	24 V DC
Power Consumption	40 W

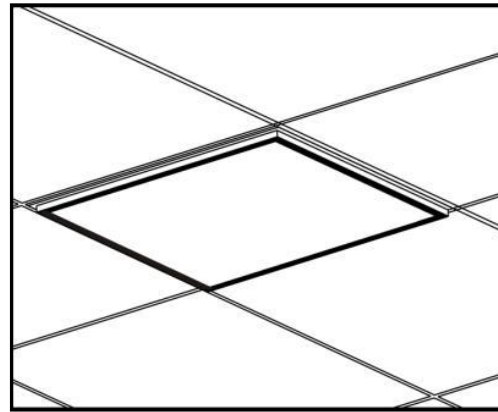

### Dimensions:

